




Product information ACA21-M12 EEC

Industrial Ethernet: System Accessories: Adapter cable: ACA21-M12 EEC
<https://e-catalog.beldensolutions.com:443/link/57078-24455-24544-24546-40817/en/conf/ui/istate>

Name ACA21-M12 EEC

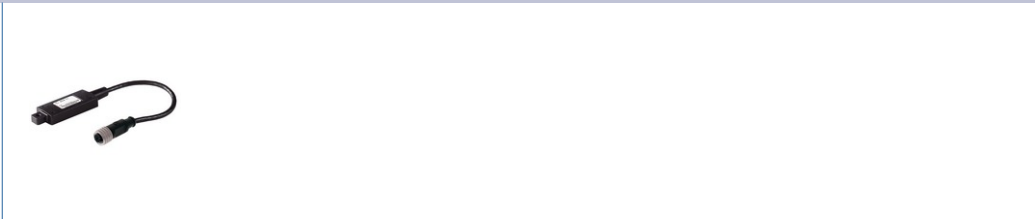

Auto-configuration adapter, with M12 connection and extended temperature range, saves two different versions of configuration data and operating software from the connected switch. It enables managed switched to be easily commissioned and quickly replaced.

Delivery informations

Availability no longer available

Product description

Description Auto-configuration adapter, with M12 connection and extended temperature range, saves two different versions of configuration data and operating software from the connected switch. It enables managed switched to be easily commissioned and quickly replaced.

Type ACA21-M12 EEC

Order No. 943 913-002

will be replaced by ACA21-M12 EEC

More Interfaces

To the USB interface on the switch M12 connection

Power requirements

Operating voltage via the USB interface on the switch

Service

Diagnostics writing to ACA, reading from ACA, writing/reading not OK;
(display using LEDs on the switch)

Configuration via USB interface of the switch and via SNMP/Web

Ambient conditions

Operating temperature -40 °C ... 70 °C

Storage/transport temperature -40 °C ... 85 °C

Relative humidity (non-condensing) 10 % ... 95 %

MTBF 359 years (MIL-HDBK-217F)

Mechanical construction

Dimensions (W x H x D) 90 mm x 27 mm x 12 mm

Mounting plug-in module

Weight 25 g

Protection class IP67

Cable length 50 cm

Mechanical stability

IEC 60068-2-27 shock 15 g, 11 ms duration, 18 shocks

IEC 60068-2-6 vibration 1 g, 10 Hz - 150 Hz, 30 cycles

EMC interference immunity

EN 61000-4-2 electrostatic discharge (ESD) 6 kV contact discharge, 8 kV air discharge

EN 61000-4-3 electromagnetic field 10 V/m

EMC emitted immunity

EN 55022 EN 55022

Approvals

Hazardous locations ISA 12.12.01 Class 1 Div. 2 (pending)

Shipbuilding Germanischer Lloyd (pending)

Safety of industrial control equipment cUL 508

Employment in vehicles E1

Scope of delivery and accessories

Scope of delivery device, operating manual

For more information please contact:

Hirschmann Automation and Control GmbH

Stuttgarter Strasse 45-51

72654 Neckartenzlingen

Germany

Phone: +49 7127/14-1809

E-Mail: inet-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.