

# ETX-2



- Feature-rich demarcation and aggregation suite, offering a complete Service Assured Access (SAA) solution
- Ideal for service providers, wholesalers, and mobile operators, seeking to deliver and monitor SLA-based MEF-certified Carrier Ethernet 2.0, Layer-3 VPN, and TDM-over-packet services
- Versatile offering of multirate Ethernet over fiber, SHDSL, VDSL, GPON, PDH, and TDM, assuring unified service delivery over any access technology
- TWAMP and Layer-2 OAM, as well as diagnostics for scalable and accurate traffic monitoring, quick fault detection, and troubleshooting of L-2 and L-3 networks
- vCPE applications including distributed network functions virtualization (D-NFV) for rapid rollout of new services and network capabilities.

The ETX-2 Carrier Ethernet demarcation device is the main component of RAD's Service Assured Access solution, providing:

- Ethernet service uniformity over multiple access technologies including GbE and 10GbE, SHDSL, VDSL, PDH, and SDH
- Operation in diverse topologies including ring, daisy chain, and hub and spoke
- PW functionality for mobile backhauling and business services
- Synchronization for mobile 2G, 3G, LTE, and LTE-A backhauling networks.

ETX-2 is offered in a variety of product options: ETX-203AM, ETX-203AX, ETX-205A, ETX-220A, ETX-2i, ETX-2i-B, and ETX-2i-10G. The ETX-2i member is a next-generation hybrid L2 and L3 demarcation device. The new ETX-2i-B branch office device is an optimized access box adapted to the requirements of next generation vCPE networks. The ETX-2i-10G device is a new ETX-2i version supporting 10GbE ports. [Table 1](#) provides further information on the capabilities offered by each ETX-2 device; [Table 2](#) by each ETX-2i device.

## MARKET SEGMENTS AND APPLICATIONS

ETX-2 is ideal for carriers, service providers, wholesale providers, and mobile operators seeking to offer unified SLA-based Ethernet business services, such as E-Line, E-LAN,

E-Tree, and E-Access services, as well as L3 VPNs and value-added services using virtualization at the customer edge.

## NETWORK TOPOLOGIES AND INTEROPERABILITY

ETX-2 supports several network topologies such as linear, daisy chain, and self-healing rings (G.8032v2), working with ETX-5 or third-party Ethernet devices.

## vCPE

ETX-2 leverages Network Functions Virtualization (NFV), allowing carriers to provide a Virtual Customer Premise Equipment (vCPE) solution in various models including Centralized and De-Centralized. This solution reduces CAPX and OPEX by eliminating the physical hardware required for hosting virtual functions.

## D-NFV

The D-NFV option allows for seamless insertion of a standard Intel x86 core as an optional module. In ETX-2i-B, also allows insertion of an x86 Rangeley-based virtualization card. The D-NFV module hosts virtual machines providing virtual network functions (VFs) or value-added service capabilities. This enables service providers to quickly and easily provide new services and implement new network capabilities, with

the benefit of function localization at the customer premises.

## CARRIER ETHERNET 2.0

ETX-2 incorporates a complete set of CE 2.0-certified Ethernet service tools that allow the service provider to distinguish between high- and low-priority traffic, and optimize TCP sessions.

ETX-2 provides MEF 10.3 rank color aware/unaware policers, delivering high-scale multi-CoS services with hierarchical Quality of Service (HQoS).

It supports advanced scheduling, WRED per CoS, shaping per EVC and per port, and flexible classification rules with flexible access lists.

## Services

ETX-2 delivers E-Line (EVL, EVPL), E-LAN (EPLAN, EVPLAN), E-Tree (EP-TREE, EVP-TREE), and E-Access services.

## Layer-2 Control Processing

ETX-2 can be configured to forward or discard Layer-2 control frames (including other vendors' L2CP frames).



## MLDv2 SNOOPING

With MLDv2 snooping, IPv6 multicast data is selectively forwarded only to a list of self-learned ports (per multicast group membership), instead of being flooded to all ports in a VLAN.

## ROUTING

ETX-2 offers an optional embedded router with Virtual Routing and Forwarding (VRF) instances, allowing service providers to deploy L2 and L3 VPNs. The forwarding engine capability ranges from 1 to 8 Gbps, allowing for Carrier Ethernet and IP services to be offered in a single device providing high-capacity performance monitoring, network function virtualization (NFV), and more.

## TDM PSEUDOWIRE

ETX-2 provides pseudowire (PW) services via four or eight integrated E1/T1 interfaces, as well as via a smart SFP (MiTOP). The PWs can be encapsulated using CESoPSN per IETF RFC 5086 or SAToP per IETF RFC 4553.

## ETHERNET OVER PDH

ETX-2 transports Ethernet over PDH infrastructure via the following NG-PDH technologies:

- Generic Framing Procedure (GFP G.7041)
- GFP or PDH (G.8040)
- PDH Virtual Concatenation (VCAT G.7043)
- Link Capacity Adjustment Scheme (VCAT G.7042).

NG-PDH solutions improve overall network availability by reducing latency and optimizing line utilization and throughput.

Integrated management of MiRiCi and MiTOP smart SFPs provides TDM (E1/T1/E3/T3/OC-3/STM-1) connectivity over PDH or SDH legacy networks.

## RESILIENCY

ETX-2 offers fast protection for virtually any kind of failure, in any linear, ring, or dual-homed topology. The device employs IEEE 802.3ad link aggregation (1:1 LAG), ITU-T G.8032v2 Ethernet ring protection, and ITU-T G.8031 Ethernet linear protection, to ensure continuous availability and sub-50ms restoration in the event of network outages.

It also provides RSTP (IEEE 802.1Q) to support loop-free Bridge forwarding over a mesh/ring physical topology.

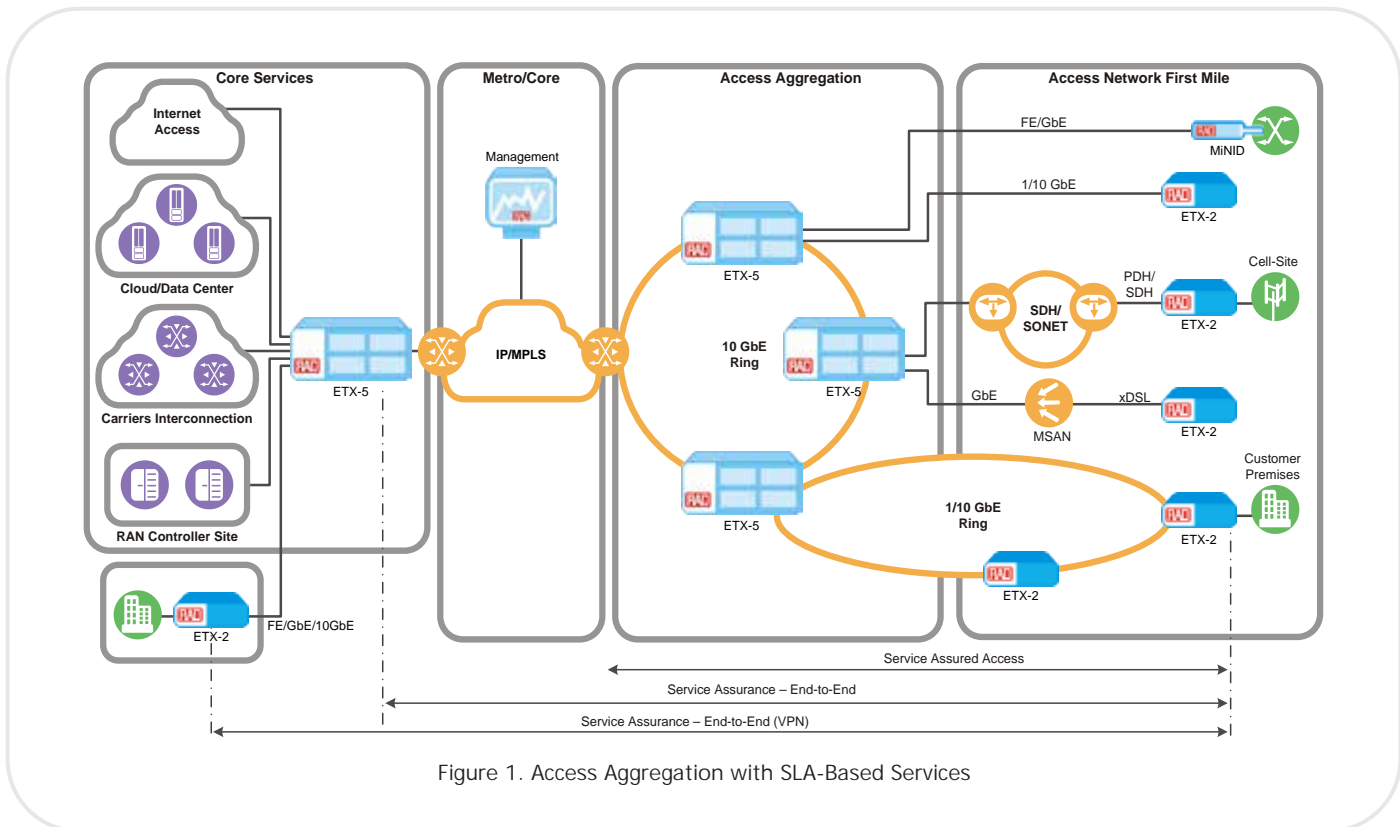


Figure 1. Access Aggregation with SLA-Based Services

### TIMING AND SYNCHRONIZATION

ETX-2 incorporates RAD's advanced SyncTop synchronization and timing over packet feature set to support mobile heterogeneous network (HetNet) topology.

The device combines Synchronous Ethernet (SyncE) with IEEE 1588v2 Precision Time Protocol per ITU-T G.8265.1 and G.8275.1 Telecom profiles for cost-effective synchronization of frequency and phase.

With an integrated GNSS receiver and 1588v2 Grandmaster support, ETX-2 offers a Distributed GM™ solution, allowing mobile operators and service providers to cost-effectively provide reliable frequency and phase accuracy for LTE-A.

The device also supports 1588v2 slave clock, boundary clock (BC), and transparent clock (TC), as well as a dual master operating simultaneously in G.8265.1 and G.8275.1 mode.

### MANAGEMENT AND SECURITY

The device can be managed via RADview, RAD's carrier-class NMS, or any SNMP-based management system. ETX-2 supports a variety of access protocols, including CLI over Telnet, SNMPv3, and TFTP.

Security features include SNMPv3, RADIUS (client authentication), TACACS+ (client authentication, authorization, and accounting), SSH, and SFTP.

Access Control Lists (ACL) can also be used to flexibly filter and mark management traffic, enabling service providers to maintain network security by dropping unwanted packets.

### MONITORING AND DIAGNOSTICS

Featuring multi-layer OAM and PM tools, ETX-2 performs hardware-based monitoring and diagnostics at high scale and precision. End-to-end connectivity OAM (IEEE 802.1ag) as well as single-segment OAM (IEEE 802.3-2005) ensure flow-level fault management and performance monitoring over Layer-2 networks and also quickly detect connectivity failures for robust protection. Layer-2 and 3 wirespeed loopbacks offer flexible diagnostic tools.

RFC-5357 TWAMP light delivers the same functionality over Layer-3 networks, as well as one-way TWAMP with counters for loss, delay, fragmented packets, reorders and duplication, in addition to configurable test packet size. Multiple VRF support the robust TWAMP setup. High-scale TWAMP is provided in ETX-205A by a PM controller (PMC) in a dedicated enclosure, and in ETX-2i by a virtual PM controller (vPMC) based on a D-NFV module.

The Performance Management Portal is an SLA assurance system that is part of the RADview management system, enabling real-time monitoring of Ethernet service performance by collecting KPI data from RAD devices.

#### Service Activation Tests

The ETX-2 family offers service activation tools with multiple RFC-2544, Y.1564, and L3 SAT testers.

#### Digital Diagnostics Monitoring

ETX-2 supports digital diagnostics monitoring (DDM) SFP functions according to SFF-8472, excluding external DDM calibration.

Table 1. Feature Comparison –ETX-2 Product Options









Specifications	ETX-203AX 	ETX-203AM 	ETX-205A 	ETX-220A 
10GbE XFP interfaces	–	–	–	ü
FE/GbE SFP interfaces	ü	ü	ü	ü
10/100/1000 electrical interfaces	ü	ü	ü	ü
GbE combo interfaces	–	2 (modular)	ü	–
Extension slot for network interface module	–	ü	–	–
PDH network interfaces (GFP mapping)	–	4/8 E1/T1, 1/2 T3	–	–
SHDSL network interfaces	–	ü	–	–
VDSL2 network interfaces	–	ü	–	–
E1/T1 user interfaces (SAToP, CESoPSN, CAS)	–	–	ü	–
E1/T1/T3/STM-1/OC-3 network interfaces via integrated Smart SFP (MiRIC)	ü	ü	ü	ü
E1/T1/T3 PWE services via integrated Smart SFP (MiTOP)	ü	ü	ü	ü
Optional timing interfaces (2 MHz, 2 Mbps, 1PPS, ToD)	–	–	ü	ü
Ethernet E-Line, E-LAN, E-Tree services	ü	ü	ü	ü
Layer-2 forwarding	ü	ü	ü	ü
Flow classification rules	ü	ü	ü	ü
ACL classification rules	ü	ü	ü	ü
Available bandwidth measurements for Layer-2 services	ü	ü	ü	ü
2-rate/3-color policing per EVC.CoS	ü	ü	ü	ü
Shaping per EVC and EVC.CoS	ü	ü	ü	ü
MultiCoS EVCs per MEF 10.3 policing	–	–	–	ü
Strict priority and weighted fair queuing (WFQ) scheduling	ü	ü	ü	ü
G.8031 linear protection	ü	ü	ü	ü
G.8032v2 ring protection	ü	ü	ü	ü
1:1 link protection with 1:1 LAG/LACP	ü	ü	ü	ü
1:1 link protection with dual homing	ü	ü	ü	ü
LAG with load balancing	–	–	–	ü
Jumbo frame support	ü	ü	ü	ü
Synchronous Ethernet (SyncE) on all interfaces	–	–	ü	ü
IEEE-1588v2 precision time protocol (PTP) per G.8265.1 and G.8275.1 Telecom profiles	TC	TC	Slave, TC, BC, GM with integrated GPS	Slave, TC, BC, GM with integrated GPS
Built-in Y.1564 service activation testers	ü	ü	ü	ü (up to 10G services)
Continuity fault management (CFM) per IEEE 802.3ag	ü	ü	ü	ü
Service utilization and performance monitoring per ITU-T Y.1731.2012, including synthetic loss measurement	ü	ü	ü	ü
Delay and loss measurements per MEF 36	ü	ü	ü	ü
TWAMP light generator and responder (SW license)	ü	ü	ü	ü
PM controller (PMC)	–	–	ü	–
Accurate one-way KPI measurements	–	–	ü	ü

Table 1. Feature Comparison – ETX-2 Product Options (Continued)

Specifications	ETX-203AX 	ETX-203AM 	ETX-205A 	ETX-220A 
LLDP discovery per IEEE 802.1AB	ü	ü	ü	ü
Link-level OAM per IEEE 802.3-2005	ü	ü	ü	ü
RMON2 port-level counters	ü	ü	ü	ü
On-demand Layer-2 and 3 loopbacks	ü	ü	ü	ü
Automatic flow and profile name completion in CLI	ü	ü	ü	ü
Zero-touch provisioning (DHCP, PPPoE)	ü	ü	ü	ü
SNMPv1/v2/v3	ü	ü	ü	ü
RADIUS and TACACS+ AAA	ü	ü	ü	ü
Network time protocol (NTP)	ü	ü	ü	ü
Power supply redundancy	–	–	ü	ü
NEBS option	ü	ü	ü	ü
Temperature-hardened option	ü	ü	ü	ü
MEF CE2.0	Certified	Certified	Certified	Certified

General and Management

Table 2. Feature Comparison – ETX-2i Product Options











Specifications	ETX-2i Fixed Ports 	ETX-2i/M & D-NFV 	ETX-2i-B 	ETX-2i-B D-NFV 	ETX-2i-10G 
10GbE XFP interfaces	–	–	–	–	ü
FE/GbE SFP interfaces	ü	ü	ü	ü	ü
10/100/1000 electrical interfaces	ü	ü	ü	–	ü
GbE combo interfaces	ü	ü	ü	–	ü
Extension slot for network interface module	–	ü	–	–	–
Extension slot for D-NFV module	–	ü	–	ü	–
PDH network interfaces (GFP mapping)	–	4/8 E1/T1, 1/2 T3	–	–	–
SHDSL network interfaces	–	ü	–	–	–
VDSL2 network interfaces	–	ü	–	–	–
E1/T1 user interfaces (SAToP, CESoPSN, CAS)	–	–	–	–	–
E1/T1/T3/STM-1/OC-3 network interfaces via integrated Smart SFP (MIRIC)	ü	ü	ü	ü	ü
E1/T1/T3 PWE services via integrated Smart SFP (MiTOP)	ü	ü	ü	ü	ü
Optional timing interfaces (2 MHz, 2 Mbps, 1PPS, ToD)	ü	ü	–	–	ü
Ethernet E-Line, E-LAN, E-Tree services	ü	ü	ü	ü	ü
Ethernet E-Access services	ü	ü	ü	ü	ü
Layer-2 forwarding	ü	ü	ü	ü	ü
Wirespeed router supporting VRFs, static routing, BGPv4, OSPFv2, BFD, and VRRP	ü (8G)	ü (8G)	ü (1G)	ü	–
Flow classification rules	ü	ü	ü	ü	ü
ACL classification rules	ü	ü	ü	ü	ü
Available bandwidth measurements for Layer-2 services	ü	ü	ü	ü	ü
2-rate/3-color policing per EVC.CoS	ü	ü	ü	ü	ü
Shaping per EVC and EVC.CoS	ü	ü	ü	ü	ü
MultiCoS EVCs per MEF 10.3 policing	ü	ü	ü	ü	ü
Strict priority and weighted fair queuing (WFQ) scheduling	ü	ü	ü	ü	ü
G.8031 linear protection	ü	ü	ü	ü	ü
G.8032v2 ring protection	ü	ü	ü	ü	ü
1:1 link protection with 1:1 LAG/LACP	ü	ü	ü	ü	ü
1:1 link protection with dual homing	ü	ü	ü	ü	ü
LAG with load balancing	ü	ü	ü	ü	ü
Jumbo frame support	ü	ü	ü	ü	ü
Synchronous Ethernet (SyncE) on all interfaces	ü	ü	–	–	ü
IEEE-1588v2 precision time protocol (PTP) per G.8265.1 and G.8275.1 Telecom profiles	Slave, TC, BC	Slave, TC, BC	TC	TC	Slave, TC, BC
Built-in Y.1564 service activation testers	ü	ü	ü	ü	ü
Continuity fault management (CFM) per IEEE 802.3ag	ü	ü	ü	ü	ü
Service utilization and performance monitoring per ITU-T Y.1731.2012, including synthetic loss measurement	ü	ü	ü	ü	ü
Delay and loss measurements per MEF 36	ü	ü	ü	ü	ü

Table 2. Feature Comparison – ETX-2i Product Options (Continued)

Specifications	ETX-2i Fixed Ports 	ETX-2i/M & D-NFV 	ETX-2i-B 	ETX-2i-B D-NFV 	ETX-2i-10G 
TWAMP light generator and responder (SW license)	ü	ü	ü	ü	ü
PM controller (PMC)	–	ü	–	ü	–
Accurate one-way KPI measurements	ü	ü	ü	ü	ü
LLDP discovery per IEEE 802.1AB	ü	ü	ü	ü	ü
Link-level OAM per IEEE 802.3-2005	ü	ü	ü	ü	ü
RMON2 port-level counters	ü	ü	ü	ü	ü
On-demand Layer-2 and 3 loopbacks	ü	ü	ü	ü	ü
Automatic flow and profile name completion in CLI	ü	ü	ü	ü	ü
Zero-touch provisioning (DHCP, PPPoE)	ü	ü	ü	ü	ü
SNMPv1/v2/v3	ü	ü	ü	ü	ü
RADIUS and TACACS+ AAA	ü	ü	ü	ü	ü
Network time protocol (NTP)	ü	ü	ü	ü	ü
Power supply redundancy	ü	ü	–	–	ü
NEBS option	ü	ü	–	–	ü
Temperature-hardened option	ü	ü	–	–	ü
MEF CE2.0	Certified	Certified	Compliant	Compliant	Compliant

General and Management

## Specifications

### CAPACITY

#### Max. Frame Size

12,288 bytes with Ethernet uplinks  
 2,048 bytes with SHDSL uplink module  
 2,112 bytes with VDSL uplink module  
 10,240 bytes with E1/T1/T3 EoPDH uplink module

### BRIDGE

#### Compliance

802.1D, 802.1Q, 802.1ad

#### Mode

VLAN-aware, VLAN-unaware

#### VLAN Editing

Inner/outer VLAN editing per VLAN and p-bit values

### ROUTER

#### (ETX-2i, ETX-2i-B)

Router (if ordered) providing:

- Up to 1 Gbps in ETX-2i-B
- Up to 8 Gbps in ETX-2i
- Layer-3 IPv4 and IPv6 forwarding with performance of over 2 MPPS
- Bidirectional forwarding detection (IP-BFD single hop) for fast forwarding path failure detection
- Inbound ACLs
- Static routing, or dynamic routing with OSPFv2, BGPv4, VRRPv2, and VRRPv3.

### HIERARCHICAL QUALITY OF SERVICE (HQOS)

#### Policing

Dual token bucket with user-configurable CIR + CBS and EIR + EBS

ETX-220A, ETX-2i, ETX-2i-B, and ETX-2i-10G: Bandwidth policing per MEF 10.3

#### Scheduling

8 × CoS per EVC scheduling elements  
 Strict Priority (SP) and Weighted Fair Queue (WFQ)

### Shaping

Per port (ETX-220A, ETX-2i, ETX-2i-B, ETX-2i-10G)

Per EVC

Per EVC.CoS

### FLOWS

#### Classification

Per port, outer VLAN or outer + inner VLAN, PCP, TOS/DSCP, Ethertype, IP/MAC source/destination address, or 5-tuple ACL

#### Max. Number of Concurrent Flows

ETX-203AM, ETX-203AX, ETX-205A: 270

ETX-220A: 1860

ETX-2i, ETX-2i-10G: 1000

ETX-2i-B: 256

### RESILIENCY

#### Dual Homing

Dual homed link redundancy

#### Link Aggregation

IEEE 802.1ax (802.3ad) 1:1 LAG with LACP for pairs of network or user Ethernet ports

#### Ethernet Ring

G.8032v2 rings with sub 50 ms protection for Ethernet traffic

#### Ethernet Path Protection

G.8031, for linear 1:1 protection

### DIAGNOSTICS

#### Loopback Tests

Non-disruptive loopback per flow, with MAC/IP address swap

Loopbacks at Ethernet port level

#### Service Activation Tests

RFC-2544: 8 built-in wirespeed testers

ITU-T Y.1564: 8 built-in wirespeed testers

#### Alarm Relay

(optional)

Type: Dry contacts with three “in”

Connector: Terminal block, 9-pin

#### ICMP ECHO

Over L2 and L3 services

Tests IP connectivity (PING)

### SHDSL INTERFACES

Provided with SHDSL network module for:

- ETX-203AM modular ordering option
- ETX-2i modular and D-NFV ordering options.

#### Type

SHDSL.bis

#### Number of Ports

2 or 4

#### Number of Wires

4 or 8

#### Connectors

Replaceable network module, with one RJ-45 connector for 4-wire ordering option or two RJ-45 connectors for 8-wire ordering option

#### Line Coding

16 or 32 TC-PAM

#### Line Rate

192–5696 kbps (see [Table 3](#))

#### Impedance

135W

#### Compliance

ITU-T G.991.2, G.994.1, ETSI TS 101524

#### Bonding

According to IEEE 802.3ah, ITU-T G.998.2

Table 3. SHDSL Typical Ranges (26 AWG)

Data Rate	4-wire		8-wire	
	[kbps]	[km] [mi]	[km] [mi]	[mi]
192	8	4.9	8	4.9
512	6.7	4.1	6.7	4.1
1536	6	3.7	6.5	4
2048	5.7	3.5	6.4	3.9
4096	5.1	3.1	5.7	3.5
4608	5	3	5.5	3.4
5696	4.6	2.8	5.1	.1
11392	2.9	1.8	4.6	2.8
17088	–	–	3.5	2.1
22784	–	–	2.9	1.8



**VDSL2 INTERFACES**

Provided with VDSL2 network module for:

- ETX-203AM modular ordering
- ETX-2i modular and D-NFV ordering options.

Operates in CPE mode only.

**Type**

VDSL.bis

**Temperature**

Operates in non-hardened devices of up to 35°C (90°F). Above this temperature, requires hardened device.

**Number of Ports**

Four VDSL2 ports (two per connector)

**Number of Wires**

8

**Connectors**

Replaceable network module, with two RJ-45 connectors (UTP)

**Impedance**

VDSL2 over POTS: 100W

VDSL2 over ISDN: 135W

**Compliance**

ITU-T G.993.2, G.997.1, G.998.2, IEEE 802.3, ETSI TS 101524

**Bonding**

According to ITU-T G.998.2 VDSL2 PTM

One bonding group; supports up to four VDSL ports per group

Bonding payload rate up to 400 Mbps DL /200 Mbps UL, with packet forwarding throughput 380 Mbps DL/180 Mbps UL

**Line Coding**

DMT

Table 4 VDSL Ranges

Profile	Bandwidth (MHz)	Number Downstream Carriers	Carrier Bandwidth (kHz)	Max Aggregate Downstream Transmit Power (dBm)	Max Downstream Throughput (Mbit/s)
8a	8.832	2048	4.3125	+17.5	50
8b	8.832	2048	4.3125	+20.5	50
8c	8.5	1972	4.3125	+11.5	50
8d	8.832	2048	4.3125	3.9	50
12a	12	2783	4.3125	3.5	68
12b	12	2783	4.3125	3.4	68
17a	17.664	4096	4.3125	3.4	100

**Payload Rate**

100 Mbps DL/50 Mbps UL per line

**E1/T1 INTERFACES**

(ETX-203AM: EoPDH E1/T1 network module)

**Number of Ports**

4 or 8

**Compliance**

G.703, G.823

**Data Rate**

E1: 2.048 Mbps

T1: 1.544 Mbps

**Line Coding**

E1: HDB3

T1: B8ZS

**Framing**

E1: Framed (G732N with CRC)

T1: Framed (ESF)

**Impedance**

E1: 120W, balanced

75W, unbalanced (via adapter cable)

T1: 100W, balanced

**Connectors**

Replaceable network module, with four RJ-45 connectors:

Four E1/T1 ports:

One E1/T1 interface per RJ-45

Eight E1/T1 ports:

Two E1/T1 interfaces per RJ-45,

with adapter cable

**ETHERNET INTERFACES**

See [Table 5](#) for ETX-2 product options; [Table 6](#) for ETX-2i.

**T3 INTERFACES**

(ETX-203AM: EoPDH T3 network module)

**Number of Ports**

1 or 2

**Compliance**

G.703, G.823

**Data Rate**

44.736 Mbps

**Line Coding**

B3ZS

**Framing**

C-bit parity

**Impedance**

75W, unbalanced

**Connectors**

Replaceable network module, with one or two pairs of BNC connectors:

One T3 port – One pair

Two T3 ports – Two pairs

**E1/T1 INTERFACES**

(ETX-205A: Built-in TDM PW E1/T1 ports)

**Number of Ports**

4 or 8

**Compliance**

E1: G.703, G.732N, G.732S

T1: ANSI T1.101, ANSI T1.403

**Data Rate**

E1: 2.048 Mbps

T1: 1.544 Mbps

**Line Coding**

E1: HDB3

T1: B8ZS

**Framing**

E1: Framed (G.732N with or without CRC)

Framed with CAS (G.732S with or without CRC)

Unframed

T1: Unframed or ESF

**Impedance**

E1: 120W, balanced

75W, unbalanced (via adapter cable)

T1: 100W, balanced

**Connectors**

Electrical, RJ-45

Table 5. Ethernet Interfaces – ETX-2 Product Options

Specifications	ETX-203AX	ETX-203AM	ETX-205A	ETX-220A	
10GbE	Number of Ports	–	–	–	Network: 1 or 2 User: 1 or 2
	Type	–	–	–	XFP
	Fiber Optic (XFP-based)	–	–	–	10GBaseSR 10GBaseER 10GBaseLR 10GBaseZR
	Connector	–	–	–	XFP slot
	XFP Transceivers	–	–	–	See <i>Note</i>
GbE	Number of Ports	Network: 2 User: 4	Network: 2 (with GbE module) User: 4	Network: 2 User: 4	Network: up to 2 User: up to 10 or 20
	Type	SFP or copper port	Network: SFP/copper combo port User: SFP or copper port	SFP/copper combo port	SFP or copper port
	Fiber Optic (SFP-based)		Fast Ethernet: 100BaseFx, 100BaseLX10, 100BaseBx10 Gigabit Ethernet: 1000BaseSx, 1000BaseLX10, 1000BaseBx10		
	Copper		10/100BaseT or 10/100/1000BaseT		
	Connector	Port 1: SFP slot All other ports: SFP slot or RJ-45	Replaceable module with SFP slot and RJ-45	SFP slot or RJ-45	SFP slot or RJ-45
	SFP Transceivers			See Note	

**Note:** It is strongly recommended to order this device with **original** RAD SFPs/XFPs. RAD cannot guarantee full compliance to product specifications for units using non-RAD SFPs/XFPs. For full details on SFP/XFP transceivers, see the SFP/XFP Transceivers data sheet at [www.rad.com](http://www.rad.com). For the list of SFP/XFP transceivers supported by ETX-220A, see the [SFP/XFP Compatibility](#) document.

Table 6. Ethernet Interfaces – ETX-2i Product Options

Specifications	ETX-2i Fixed Ports	ETX-2i/M & D-NFV	ETX-2i-B	ETX-2i-B D-NFV	ETX-2i-10G	
10GbE	Number of Ports	–	–	–	–	2 or 4
	Type	–	–	–	–	SFP+
	Fiber Optic (XFP-based)	–	–	–	–	1000BaseLx/Sx 10GBase-SR/LR/ER/ZR
	Connector	–	–	–	–	SFP+ LC
	XFP Transceivers	–	–	–	–	See <i>Note</i>
GbE	Number of Ports	8	4 (2 additional optional ports with GbE module)	Network: 2 User: 2/4/8	Network: 2 User: 4	4 or 8
	Type	SFP/copper (RJ-45) combo ports	SFP/copper (RJ-45) combo ports	Network: SFP port User: SFP/copper combo port, SFP port, or copper port	Network: SFP port User: Copper (UTP) port	SFP port, UTP port
	Fiber Optic (SFP-based)			100BaseFx, 1000BaseLx/Sx,		
	Copper			10/100/1000BaseT		
	Connector	SFP slot or RJ-45	SFP slot or RJ-45	Port 1: SFP slot All other ports: SFP slot or RJ-45	Ports 1 and 2: SFP slot Ports 3 to 6: RJ-45	SFP slot or RJ-45
SFP Transceivers			See Note			

**Note:** It is strongly recommended to order this device with **original** RAD SFPs/XFPs. RAD cannot guarantee full compliance to product specifications for units using non-RAD SFPs/XFPs. For full details on SFP/XFP transceivers, see the SFP/XFP Transceivers data sheet at [www.rad.com](http://www.rad.com). For the list of SFP/XFP transceivers supported by ETX-220A, see the [SFP/XFP Compatibility](#) document.

## PSEUDOWIRE

### (ETX-205A)

#### Payload Encapsulation

CESoPSN, SAToP

#### Network Encapsulation

MEF 8, UDP/IP

## TIMING

### Synchronous Ethernet

ITU-T G.8261-G.8264

#### 1588v2

Slave clock (ETX-205A, ETX-220A, ETX-2i, ETX-2i-10G)

Boundary clock (ETX-205A, ETX-220A, ETX-2i, ETX-2i-10G)

Grandmaster with GNSS (ETX-205A, ETX-220A)

Dual master operating simultaneously in G.8265.1 and G.8275.1 mode (ETX-205A, ETX-220A, ETX-2i, ETX-2i-10G)

Transparent clock (TC)

Phase and frequency synchronization

#### Station Clock

### (ETX-205A, ETX-220A, ETX-2i, ETX-2i-10G)

Type: Balanced E1, unbalanced E1 (via adapter cable)

Connector: RJ-45

### PTP Ports

#### (ETX-205A, ETX-220A, ETX-2i, ETX-2i-10G)

ToD/1PPS (RJ-45)

External clock (CONN.COAX SMA)

1PPS (CONN.COAX SMA)

## MANAGEMENT

### Ethernet Management Port

Type: 10/100/1000BaseT

Connector: RJ-45

### Control Port

#### (ETX-203AM, ETX-203AX, ETX-205A, ETX-220A)

Interface: V.24/RS-232 DCE

Connector: RJ-45

Format: Asynchronous

Data rate: 9.6, 19.2, or 115.2 kbps

#### (ETX-2i, ETX-2i-B, ETX-2i-10G)

Interface: V.24/RS-232 DCE

Connector: Mini USB

Format: Asynchronous

Data rate: 9.6, 19.2, or 115.2 kbps

### Management Options

Password-protected access, authorization levels

Secure CLI via SSH

Telnet, SNMPv3, SFTP

RADIUS or TACACS+ authentication

Plug and play zero touch provisioning

### Routing for Management

IP forwarding, dual-stack IPv4 and IPv6 routing, static routing

## GENERAL

### Compliance

CE 2.0, MEF 6 (E-Line – EPL and EVPL, E-LAN – EPLAN and EVPLAN), MEF 10, MEF 9, MEF 14, MEF 20, MEF 36, IEEE 802.3, 802.3u, 802.1D, 802.1Q, 802.1p, 802.3ad, 802.3-2005, 802.1ax, 802.1ag, ITU-T Y.1731, G.8031, G.8032v2, G.8262, G.8265, RFC-2544, ITU-T Y.1564

Table 7. Power, Physical, and Environmental Specifications – ETX-2 Product Options

Specifications	ETX-203AX	ETX-203AM	ETX-205A	ETX-220A	
Power	Power (19" enclosure) –	–	AC: 100 to 240 VAC, 50/60 Hz DC: 24/48 VDC nominal (20 to 72 VDC)	AC: 100 to 240 VAC, 50/60 Hz DC: -48 VDC nominal (40 to 72 VDC)	
	Power (8.5" enclosure)	Wide-range AC/DC with auto detection AC: 85 to 264 VAC, 47/63 Hz DC: 48 VDC (40 to 370 VDC)	AC: 100 to 230 VAC ( $\pm 10\%$ ), 47–63 Hz DC: -48 VDC (36 to 72 VDC)	AC: 100 to 240 VAC, 50/60 Hz DC: 48 VDC (48 to 60 VDC)	–
	Power Consumption	15W max	Modular base: 12W max Modular uplink: 5W max VDSL: 10W max	19": 22W max ½ 19": 21W max PMC option: 90W max	70W max
Physical	Size (19" enclosure):				
	Height	–	–	43.7 mm (1.7 in)	43.7 mm (1.7 in)
	Width	–	–	440 mm (17.4 in)	440 mm (17.4 in)
	Depth	–	–	240 mm (9.5 in)	Non-NEBS: 240 mm (9.5 in) NEBS: 300 mm (11.8 in)
	Size (8.5" enclosure):				
	Height	43.7 mm (1.7 in)	43.7 mm (1.7 in)	43.7 mm (1.7 in)	–
	Width	220 mm (8.6 in)	215 mm (8.5 in)	215 mm (8.5 in)	–
Depth	170 mm (6.7 in)	300 mm (11.8 in)	300 mm (11.8 in)	–	
Environment	Storage Temperature	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)
	Operating Temperature	Regular: 0 to 50°C (32 to 122°F) Temperature hardened and NEBS: -20 to 65°C (-4 to 149°F)	Regular: 0 to 50°C (32 to 122°F) Temperature hardened and NEBS: -20 to 65°C (-4 to 149°F)	Regular: 0 to 50°C (32 to 122°F) Temperature hardened and NEBS: -40 to 65°C (-40 to 149°F)	Regular: 0 to 50°C (32 to 122°F) Temperature hardened and NEBS: -20 to 65°C (-4 to 149°F)
	Humidity	Up to 90%, non-condensing	Up to 90%, non-condensing	Up to 90%, non-condensing	Up to 90%, non-condensing

Table 8. Power, Physical, and Environmental Specifications – ETX-2i Product Options

Specifications	ETX-2i Fixed Ports	ETX-2i/M & D-NFV	ETX-2i-B	ETX-2i-B D-NFV	ETX-2i-10G
Power (19" enclosure)	AC: 100 to 240 VAC, 50/60 Hz DC: 24/38 to 72 VDC	AC: 100 to 240 VAC, 50/60 Hz DC: 24/38 to 72 VDC	–	–	–
Power (8.5" enclosure)	AC: 100 to 240 VAC 50/60 Hz DC: Dual DC feed of 24/38 to 72 VDC	AC: 100 to 240 VAC 50/60 Hz DC: Dual DC feed of 24/38 to 72 VDC	Wide-range AC/DC with auto detection AC: 85 to 264 VAC, 47/63 Hz DC: 48 VDC (40 to 300 VDC)	AC: 100 to 240 VAC 50/60 Hz DC: Dual DC feed of 24/38 to 72 VDC	AC: 100 to 240 VAC, 50/60 Hz DC: 24/38 to 72 VDC
Power Consumption	Non-modular product base (8GbE): 35W max	Modular base: 30W Modular uplink: 5W max VDSL: 10W max	23 W	48 W	66 W
Size (19" enclosure):					
Height	43.7 mm (1.7 in)	43.7 mm (1.7 in)	–	–	–
Width	440 mm (17.4 in)	440 mm (17.4 in)	–	–	–
Depth	240 mm (9.5 in)	300 mm (11.8 in)	–	–	–
Size (8.5" enclosure):					
Height	43.7 mm (1.7 in)	43.7 mm (1.7 in)	1U: 43.7 mm (1.7 in) 2U: 88.2 mm (3.5 in)	43.7 mm (1.7 in)	43.7 mm (1.7 in)
Width	215.9 mm (8.5 in)	215.9 mm (8.5 in)	220 mm (8.7 in)	215.5 mm (8.5 in)	215.5 mm (8.5 in)
Depth	300 mm (11.8 in)	300 mm (11.8 in)	170 mm (6.7 in)	280 mm (11 in)	301 mm (11.8 in)
Storage Temperature	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)	-40 to 85°C (-40 to 185°F)
Operating Temperature	Regular: 0 to 50°C (32 to 122°F) Temperature hardened: -40 to 65°C (-40 to 149°F)	Regular: 0 to 50°C (32 to 122°F) Temperature hardened: -40 to 65°C (-40 to 149°F)	Regular: -5 to 55°C (23 to 131°F) ETX-2i-B with ten ports (2U): -20 to 65°C (-4 to 149°F)	Regular: 0 to 50°C (32 to 122°F)	Regular: 0 to 50°C (32 to 122°F) Temperature hardened: -40 to 65°C (-40 to 149°F)
Humidity	5% to 90%, non-condensing	5% to 90%, non-condensing	5% to 90%, non-condensing	5% to 90%, non-condensing	5% to 90%, non-condensing

## Ordering

### RECOMMENDED CONFIGURATIONS

#### ETX-203AX:

##### ETX-203AX/2SFP/4SFP

2 SFP Fast Ethernet ports, 4 empty SFP slots

##### ETX-203AX/GE/2SFP/4SFP

2 SFP GbE Ethernet ports, 4 empty SFP slots

##### ETX-203AX/2SFP/2UTP2SFP

2 SFP Ethernet ports, 2 UTP Ethernet ports, 2 SFP Ethernet ports

##### ETX-203AX/2SFP/4UTP

2 SFP Ethernet ports, 4 Ethernet UTP ports

##### ETX-203AX/2UTP/4UTP

2 UTP Ethernet ports, 4 Ethernet UTP ports

##### ETX-203AX/1SFP1UTP/4UTP

1 SFP Ethernet slot, 1 UTP Ethernet port, 4 Ethernet UTP ports

*Note for ETX-203AX: All ordering options are available with FE, GE, GE30, or H (hardened) option.*

#### ETX-203AM:

##### ETX-203AM/DC/GE30/2ETH/2SFP2UTP

DC power supply, GbE Ethernet ports with multiple shapers, Ethernet network module, 2 SFP Ethernet ports, 2 copper Ethernet ports

##### ETX-203AM/AC/SH4W/4UTP

AC power supply, fast Ethernet ports, SHDSL 4-wire network module, 4 copper Ethernet ports

##### ETX-203AM/AC/GE/2ETH/4SFP

AC power supply, GbE Ethernet ports, Ethernet network module, 4 SFP Ethernet ports

##### ETX-203AM/AC/GE30/8E1T1/4UTP

AC power supply, GbE Ethernet ports, multiple shaped EVCs, E1/T1 8-port network module, 4 copper Ethernet ports

##### ETX-203AM/AC/GE/4UTP

AC power supply, GbE Ethernet ports, no network module, 4 copper Ethernet ports

##### ETX-203AM/H/AC/GE30/VDSL8W/POTS/4UTP

Hardened, AC power supply, GbE Ethernet ports, four VDSL ports (8-wire) over POTS, four copper Ethernet ports

##### ETX-203AM/H/AC/GE30/VDSL8W/ISDN/4UTP

Hardened, AC power supply, GbE Ethernet ports, four VDSL ports (8-wire) over ISDN, four copper Ethernet ports

#### Notes for ETX-203AM:

• All ordering options are available with FE, GE, GE30, or H (hardened) option.

• Only the Ethernet network module (2ETH) is NEBS certified.

#### ETX-205A:

##### ETX-205A/AC/19

AC power supply, 19" enclosure

##### ETX-205A/AC/19/4E1T1

AC power supply, 19" enclosure, 4 E1/T1 ports

##### ETX-205A/AC/19/8E1T1

AC power supply, 19" enclosure, 8 E1/T1 ports

##### ETX-205A/AC/19/SYE

AC power supply, 19" enclosure, SyncE

##### ETX-205A/AC/19/PTP

AC power supply, 19" enclosure, 1588v2 timing and SyncE

##### ETX-205A/AC/19/4E1T1/PTP

AC power supply, 19" enclosure, 4 E1/T1 ports, 1588v2 timing and SyncE

##### ETX-205A/AC/19/8E1T1/PTP

AC power supply, 19" enclosure, 8 E1/T1 ports, 1588v2 timing and SyncE

##### ETX-205A/AC/19/GPS

AC power supply, 19" enclosure, integrated grandmaster and GNSS receiver

##### ETX-205A/AC/PTP

AC power supply, 8.5" enclosure, 1588v2 timing and SyncE

##### ETX-205A/DC/4E1T1/PTP

DC power supply, 8.5" enclosure, 4 E1/T1 ports, 1588v2 timing and SyncE

##### ETX-205A/HN/DCR/19/PTP

Dual DC power supply, temperature-hardened NEBS-certified 19" enclosure, 1588v2 timing and SyncE

#### ETX-205A (PMC):

##### ETX-205A/AC/19V/DC2X/128S/PMC

AC power supply, dual core 2.5 GHz x86 processor, 128 GB solid state disk (SSD), PM controller (PMC) application

*Note for ETX-205A: 19" ordering options are available with any combination of AC or DC power supplies.*

#### ETX-220A:

##### ETX-220A/AC/2XFP/20S/SYE/ESK

AC power supply, 2 XFP 10GbE ports, 20 SFP GbE ports, SyncE, enhanced SW key

##### ETX-220A/AC/2XFP/10U10S/SYE/ESK

AC power supply, 2 XFP 10GbE ports, 10 copper GbE ports, 10 SFP GbE ports, SyncE, enhanced SW key

##### ETX-220A/AC/3XFP/10S/SYE/ESK

AC power supply, 3 XFP 10GbE ports, 10 SFP GbE ports, SyncE, enhanced SW key

##### ETX-220A/AC/3XFP/10U/SYE/ESK

AC power supply, 3 XFP 10GbE ports, 10 copper GbE ports, SyncE, enhanced SW key

##### ETX-220A/AC/3XFP/10S/PTP/ESK

AC power supply, 3 XFP 10GbE ports, 10 SFP GbE ports, SyncE, 1588v2, enhanced SW key

##### ETX-220A/AC/4XFP/10U/SYE/ESK

AC power supply, 4 XFP 10GbE ports, 10 copper GbE ports, SyncE, enhanced SW key

##### ETX-220A/AC/4XFP/SYE/ESK

AC power supply, 4 XFP 10GbE ports, SyncE, enhanced SW key

##### ETX-220A/AC/2XFP/20S/SYE/BSK

AC power supply, 2 XFP 10GbE ports, 20 SFP GbE ports, SyncE, basic SW key

##### ETX-220A/AC/2XFP/10U10S/SYE/BSK

AC power supply, 2 XFP 10GbE ports, 10 copper GbE ports, 10 SFP GbE ports, SyncE, basic SW key

##### ETX-220A/AC/3XFP/10S/SYE/BSK

AC power supply, 3 XFP 10GbE ports, 10 SFP GbE ports, SyncE, basic SW key

##### ETX-220A/AC/3XFP/10U/SYE/BSK

AC power supply, 3 XFP 10GbE ports, 10 copper GbE ports, SyncE, basic SW key

##### ETX-220A/AC/3XFP/10S/PTP/BSK

AC power supply, 3 XFP 10GbE ports, 10 SFP GbE ports, SyncE, 1588v2, basic SW key

##### ETX-220A/DC/4XFP/10S/SYE/BSK

DC power supply, 4 XFP 10GbE ports, 10 SFP GbE ports, SyncE, basic SW key

##### ETX-220A/DC/4XFP/10U/SYE/BSK

DC power supply, 4 XFP 10GbE ports, 10 copper GbE ports, SyncE, basic SW key

##### ETX-220A/DC/4XFP/SYE/BSK

DC power supply, 4 XFP 10GbE ports, SyncE, basic SW key

##### ETX-220A/AC/2XFP/20S/GPS/BSK

AC power supply, 2 XFP 10GbE ports, 20 SFP GbE ports, integrated grandmaster and GNSS receiver, basic SW key

##### ETX-220A/ACR/4XFP/PTP/BSK

Dual AC power supply, 4 XFP 10GbE ports, SyncE and 1588v2 timing, basic SW key

#### Notes for ETX-220A:

- The Basic Software Key (BSK) option provides basic scheduling with a single queue block per port; the Enhanced Software Key (ESK) option allows for HQoS with shaping per EVC by providing more queue blocks per port (refer to user manual for the exact number).
- All ordering options are available with AC, DC, dual AC (ACR) or dual DC (DCR) power supplies.
- All ordering options are available with H (hardened) option.

## ETX-2i:

### ETX-2i/AC/19

AC power supply, 19" enclosure, 8 fixed GbE SFP/copper combo ports

### ETX-2i/AC/M

AC power supply, 8.5" enclosure, 4 fixed GbE SFP/copper combo ports, modular uplink

### ETX-2i/DDC/M/PTP

Dual DC feed power supply, 8.5" enclosure, 4 fixed GbE SFP/copper combo ports, modular uplink, SyncE and 1588v2 timing

### ETX-2i/H/AC/19/PTP

AC power supply, 19" enclosure, temperature-hardened, 8 fixed GbE SFP/copper combo ports, SyncE and 1588v2 timing

### ETX-2i/H/ACR/19/PTP

Dual AC power supply, 19" enclosure, temperature-hardened, 8 fixed GbE SFP/copper combo ports, SyncE and 1588v2 timing

### ETX-2i/HN/AC/19/PTP

AC power supply, 19" enclosure, NEBS compliant, temperature-hardened, 8 fixed GbE SFP/copper combo ports, SyncE and 1588v2 timing

### ETX-2i/N/ACHP/19V

AC power supply, 19" enclosure, NEBS compliant, 4 fixed GbE SFP/copper combo ports, modular uplink, D-NFV module slot

### ETX-2i/H/AC/M/VDSL8W/POTS

Hardened, AC power supply, modular uplink, four VDSL ports (8-wire) over POTS

### ETX-2i/H/AC/M/VDSL8W/ISDN

Hardened, AC power supply, modular uplink, four VDSL ports (8-wire) over ISDN

*Note for ETX-2i: Any D-NFV option must be ordered together with a RADcare Package and RADcare Project Assurance Package.*

## ETX-2i-B:

### ETX-2i-B/WR/2SFP/2CMB

Wide-range power supply, 1/2 19" metal enclosure, 2 SFP Ethernet ports, 2 combo ports

### ETX-2i-B/WR/2SFP/2CMB/DRC

Wide-range power supply, 1/2 19" metal enclosure, 2 SFP Ethernet ports, 2 combo ports, 2 IN dry contacts

### ETX-2i-B/WR/2SFP/4UTP

Wide-range power supply, 1/2 19" metal enclosure, 2 SFP Ethernet ports, 4 Ethernet UTP ports

### ETX-2i-B/H/WR/2SFP/8SFP

Wide-range power supply, temperature-hardened, 1/2 19" metal enclosure, 2 SFP network ports, 8 SFP user ports

*Note: Although this device option has ten active ports, processing capability is limited to six GbE.*

### ETX-2i-B/AC/N/2SFP/4UTP

AC power supply, 1/2 19" metal enclosure, 2 SFP Ethernet ports, 4 Ethernet UTP ports, D-NFV module slot

### ETX-2i-B/DDC/N/2SFP/4UTP

Dual DC feed power supply, 1/2 19" metal enclosure, 2 SFP Ethernet ports, 4 Ethernet UTP ports, D-NFV module slot

## ETX-2i-10G:

### ETX-2i-10G/AC/2SFPP/4SFP

AC power supply, 1/2 19" metal enclosure, 2 SFP Plus Ethernet ports, 4 SFP Ethernet ports

### ETX-2i-10G/AC/2SFPP/4SFP4UTP

AC power supply, 1/2 19" metal enclosure, 2 SFP Plus Ethernet ports, 4 SFP Ethernet ports, 4 Ethernet UTP ports

### ETX-2i-10G/AC/4SFPP/4SFP

AC power supply, 1/2 19" metal enclosure, 4 SFP Plus Ethernet ports, 4 SFP Ethernet ports

### ETX-2i-10G/AC/4SFPP/4SFP4UTP

AC power supply, 1/2 19" metal enclosure, 4 SFP Plus Ethernet ports, 4 SFP Ethernet ports, 4 Ethernet UTP ports

### ETX-2i-10G/DDC/4SFPP/4SFP4UTP/PTP

Dual DC feed power supply, 1/2 19" metal enclosure, 4 SFP Plus Ethernet ports, 4 SFP Ethernet ports, 4 Ethernet UTP ports, SyncE and 1588v2 timing

## SPECIAL CONFIGURATIONS

Please contact your local RAD partner for additional configuration options for ETX-203AX, ETX-203AM, ETX-205A, ETX-220A, ETX-2i, and ETX-2i-B (including the integrated router option).

## SUPPLIED ACCESSORIES

### ETX-203AX:

AC power cord

### ETX-203AM:

AC power cord (if AC power supply is ordered), or DC connector kit (if DC power supply is ordered)

### CBL-E1-SPLT

Cable to extract 2 E1/T1 ports from one RJ-45 connector of ETX-203AM E1/T1 network module (four cables are supplied if 8 E1T1 option is ordered)

### ETX-205A:

Power cord (one per power supply)

### RM-34

Hardware kit for mounting one 19" ETX-205A unit in a 19" rack

### ETX-220A:

Power cord (one per power supply)

### RM-34

Hardware kit for mounting one ETX-220A unit in a 19" rack

### ETX-2i, ETX-2i-B, ETX-2i-10G:

AC power cord

### RM-34

HW kit for mounting 19" unit in a 19" rack (for ETX-2i only)

## OPTIONAL ACCESSORIES

### ETX-203AX:

AC/DC adapter

### CBL-RJ45/D9/F/6FT

Control port cable with male RJ-45 and female DB-9 connector

### RM-33-2

Hardware kit for mounting one or two ETX-203AX units in a 19" rack

### RM-35/23-TYPE1-NEBS

Hardware kit for mounting one or two NEBS-compliant ETX-203AM or ETX-203AX units in a 19" rack

### ETX-203AX-SW/GE30

Software license for 1 Gbps per port, and up to 64 shaped EVCs per port



**ETX-203AX-SW/GE**

Software license for 1 Gbps per port

**ETX-203AM:****CBL-RJ45/D9/F/6FT**

Control port cable with male RJ-45 and female DB-9 connector

**CBL-RJ45/2BNC/E1/X**

Balanced E1 (RJ-45) to unbalanced E1 (2 BNC) adapter cable

**RM-35/@**

Hardware kit for mounting one or two ETX-203AM units in a 19" rack

@ Rack mount kit (Default=both kits):

**P1** Kit for mounting one unit

**P2** Kit for mounting two units

**RM-35/23-TYPE1-NEBS**

Hardware kit for mounting one or two NEBS-compliant ETX-203AM or ETX-203AX units in a 19" rack

**WM-35**

Wall mount hardware kit for one ETX-203AM unit

**ETX-203AM-SW/GE30**

Software license for 1 Gbps per port, and up to 64 shaped EVCs per port

**ETX-203AM-SW/GE**

Software license for 1 Gbps per port

**ETX-205A:****CBL-RJ45/D9/F/6FT**

Control port cable with male RJ-45 and female DB-9 connector

**CBL-RJ45/2BNC/E1/X**

Balanced E1 (RJ-45) to unbalanced E1 (2 BNC) adapter cable

**RM-34-23**

Hardware kit for mounting one 19" ETX-205A unit in a 23" rack

**RM-35/@**

Hardware kit for mounting one or two 8.5" ETX-205A units in a 19" rack

@ Rack mount kit (Default=Both kits):

**P1** Kit for mounting one unit

**P2** Kit for mounting two units

**WM-34**

Wall mount hardware kit for one 19" ETX-205A unit

**WM-35**

Wall mount hardware kit for one 8.5" ETX-205A unit

**ETX-205A-PS/?/!**

? NEBS

**NULL** International

**N** NEBS3

! Power supply

**AC** Single AC power supply

**DC** Single DC power supply

**ETX-220A:****CBL-RJ45/D9/F/6FT**

Control port cable with male RJ-45 and female DB-9 connector

**RM-34-23**

Hardware kit for mounting one ETX-220A unit in a 23" rack

**WM-34**

Wall mount HW kit for one ETX-220A unit

**ETX-220A\_PS/N/!**

! Power supply:

**AC** Single AC power supply

**DC** Single DC power supply

**ETX-2i, ETX-2i-B, ETX-2i-10G:****AC/DC adapter****CBL-MUSB-DB9F**

Mini-USB cable to connect device to a serial port (ETX-2i, ETX-2i-10G)

**CBL-RJ45/D9/F/6FT**

Control port cable with male RJ-45 and female DB-9 connector (ETX-2i-B)

**RM-33-2**

Hardware kit for mounting one or two ETX-2i-B units in a 19" rack

**RM-35/@**

Hardware kit for mounting one or two 8.5" units in a 19" rack

@ Rack mount kit (Default=Both kits):

**P1** Kit for mounting one unit

**P2** Kit for mounting two units

**RM-42**

Rack-mount kit for mounting ETX-2i-B 2U unit

**WM-35**

Wall mount hardware kit for one 8.5" unit

**WM-35-TYPE4**

Wall mount HW kit for ETX-2i-B

**ETX-2i-PS/?/!**

? NEBS

**NULL** International

**N** NEBS3

! Power supply

**AC** Single AC power supply

**DCHP** High power DC power supply for D-NFV

**ACHP** High power AC power supply for D-NFV

## ETX-2

**Network interface modules for modular options (for ETX-2i and ETX-203AM):****ETX-M/2ETH**

Ethernet uplink module with two combo ports

**ETX-M/SH4W**

EFM bonded uplink module with two SHDSL ports (4-wire)

**ETX-M/SH8W**

EFM bonded uplink module with four SHDSL ports (8-wire)

**ETX-M/VDSL8W/POTS**

EFM bonded uplink module with four VDSL ports (8-wire) over POTS

**ETX-M/VDSL8W/ISDN**

EFM bonded uplink module with four VDSL ports (8-wire) over ISDN

**ETX-M/4E1T1**

Ethernet uplink module with 4 E1/T1 ports

**ETX-M/8E1T1**

Ethernet uplink module with 8 E1/T1 ports

*Note: The CBL-E1-SPLT cables must be ordered separately when ordering this module.*

**ETX-M/1T3**

Ethernet uplink module with 1 T3 port

**ETX-M/2T3**

Ethernet uplink module with 2 T3 ports

**SFP-GPON-1DH**

GPON optical network terminal SFP

**D-NFV modules for D-NFV ordering options (for ETX-2i):****ETX-DNFV-M/i7/128S**

D-NFV module based on Quad Core i7 and 128 GB SSD

**ETX-DNFV-M/i7/128S/8R**

D-NFV module based on Quad Core i7 and 128 GB SSD, 8 GB RAM

**ETX-DNFV-M/i7/128S/16R**

D-NFV module based on Quad Core i7 and 128 GB SSD, 16 GB RAM

**ETX-DNFV-M/R4C/128S/8R**

D-NFV module based on Intel® Atom Rangeley C2558 and 128 GB SSD, 8 GB RAM

**ETX-DNFV-M/R8C/128S/8R**

D-NFV module based on Intel® Atom Rangeley C2758 and 128 GB SSD, 8 GB RAM

**SOFTWARE LICENSES FOR ETX-2****ETX-2-SW TWAMP**

License to activate and operate TWAMP related functionalities in ETX-2x.

**International Headquarters**

24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 6474436  
E-mail market@rad.com

**North America Headquarters**

900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail market@radusa.com